

DB5 Intrinsically Safe Sounder Type DB-5

Description

The DB5 Sounder is a strong, lightweight warning sounder, CENELEC certified to Ex II 1G EExia IIC T4 (Ta -20°C to 55°C) with 26 user-selectable tones, and an output level of over 100dB.

Also available certified to CSA, FM standards and for use in mines.

Connection Details

1	+ve common
2	+ve common
3	-ve 1 st tone
4	-ve 1 st tone
5	-ve 2 nd tone
6	-ve 2 nd tone

To generate the first tone simply connect supply +ve to terminals 1 or 2, and supply -ve to terminals 3 or 4. To generate the second tone simply connect supply +ve to terminals 1 or 2, and supply -ve to terminals 5 or 6. Note, if +ve is connected to 2nd sound, it will permanently damage the sounder

Each terminal is duplicated and internally connected to allow for ease of connecting subsequent horns or end-of-line (EOL) resistors.

Installation

Mounting

The sounder should be positioned using the two available fixing holes in the base. It is recommended that stainless steel nuts and bolts be used if the environment is corrosive.

The sounder will operate in any attitude, from horizontal to vertical. However, it is important to note that the alignment and mounting of the sounder should ensure that:

- Dust or debris cannot lodge in the re-entrant horn. Water from hose's, jets or rain cannot settle in the re-entrant horn.
- The sounder should be installed in accordance with certified parameters.

Removing and Replacing the cover

Remove the cover/horn of the sounder by rotating the top of the sounder anti-clockwise, and pulling the cover/horn gently away from the base.

Replacing the cover/horn is a reverse process of the above, but care should be taken to ensure that the seal is securely located in its groove during re-assembly.

Wiring

Cable termination should be in accordance with specifications applying to the application. It is recommended that all cables and cores should be fully identified. Ensure that only the correct glands are used and that the assembly is shrouded. Refer to the connection details below.

The twinned-pair inlet terminals and deep base are convenient for looping to other circuits or for siting end-of-line resistors. The base has three knockouts, two on the side and one on the base, to accommodate a 20mm conduit or M20 cable glands. The units are polarised and a chain may be fitted with an "end of line" resistor for reverse polarity testing and to permit line monitoring.

Recommended Cable

0.5 to 2.5mm² with earthed screen and insulating sheath. Cable parameters are determined by the output parameters of the interface selected.

Safe Area Use


In safe areas, the sounders can be powered directly from 24VDC/12VDC. The absence of any current limitation increases the output by approx 4dB.

Sound

The sound level for each of the individual tones in shown in Table 2. This is assuming one DB5 set at full volume, driven from a suitable IS interface. Where two sounders are driven from the same IS source, the output will decrease by 1.5dB. Three sounders will decrease by 2.2dB. A single turn potentiometer is provided to reduce the volume level by a minimum of 15dB.

Manufacturers of

Alarm Annunciators and Systems | Sequential Event Recorders | Display Facias | Hazardous Area Interface, Alarm and Display Products | Signal Conditioning & Trip Amplifiers | Process Instrumentation



Electrostatic Risk

By virtue of its shape, design and position of use, it is not considered to be an electrostatic risk, however, the apparatus must not be installed in a position where it may be subjected to an excessive air flow that might cause an electrostatic build-up.

Intrinsically Safe Specification

Certification

Certified by BASEEFA to Ex II 1G, EEx ia IIC T4 (Ta -20°C to 55°C) to CENELEC standards. Certificate No. BAS00ATEX1259

Location

IIC T4, installation can be in any zone.

Safety Parameters

DB5:

$U_i = 28V$, $I_i = 28mA$, $P_i = 0.81W$

$C_i = 0$, $L_i = 20mH + 1000\Omega$

The DB5 Sounder has an internal resistance R_i of 1000Ω which ensures that the input current limit I_i for inductive safety is not exceeded

DB5-12:

$U_i = 15.7V$, $I_i = 37mA$, $P_i = 0.56W$

$C_i = 0$, $L_i = 20mH + 325\Omega$

The DB5-12 Sounder has an internal resistance R_i of 325Ω which ensures that the input current limit I_i for inductive safety is not exceeded

DB5:

Zener Barrier Interfaces

Suitable models are: 24v version MTL7728+, 12v version MTL7715+

Galvanic Isolator Interfaces

Suitable models are: MTL5025

DB5-12:

Zener Barrier Interfaces

Suitable model: MTL7715+

Weight

300g

Environment

Operating temperature -20 to +55°C

Storage temperature -40 to +80°C

Humidity 5-95% RH, non-condensing

Protection IP65

Construction

ABS enclosure with encapsulated electronic module. Colour red.

Supply

DB5:

Min/max at terminals = 15-28VDC

Current (through interface) = 14mA

DB5-12:

Min/max at terminals = 9.6-15VDC

Current (through interface) = 12mA

EMC Compliance

Immunity to EN50082-2:1995

Emissions to EN50081-2:1994

Terminals

For conductors up to 2.5mm²



Mining Certification

Certification

Certified by EECS to Ex I M1 EEx ia 1
Certificate No: MECS01ATEX4260

Intrinsically Safe Parameters

DB-5-M-012:

Ui = 14.4V, Uo = 14.4V
Ci = 0, Li = 0

FM Certification

Certification

Intrinsically Safe for Class I, Division 1, Groups A,B,C
and D.

Certificate No: J.I 3008604

Entity parameters for DB5 (24V version):

Vmax = 28VDC, Imax = 147mA, Pmax = 810mW,
Ci = 0, Li = 0

Entity parameters for DB5-12 (12V version):

Vmax = 15.7VDC, Imax = 150mA, Pmax = 560mW,
Ci = 0, Li = 0

CSA Certification

Certification

Certified by CSA to standard numbers 0, 0.4, 0.5, 25,
30, 205. Class 1 Groups A,B,C and D

Certificate No: 79122

Supply

Min/max at terminals = 15-28VDC
Current (through interface) = 14mA

Environment

Operating temperature -20 to +55°C
Storage temperature -40 to +80°C
Humidity 5-95% RH, non-condensing
Protection IP65

Zener Barrier Interfaces

Contact RTK Instruments Ltd for suitable models


Galvanic Isolator Interfaces

Contact RTK Instruments Ltd for suitable models





Installation Diagram

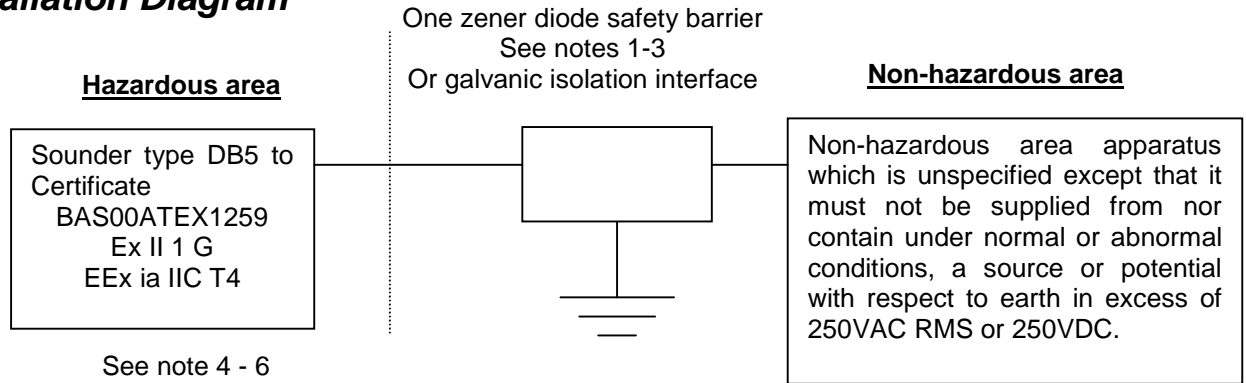

Notes:

- Any shunt zener diode safety barrier or galvanic isolator, certified by an EEC approved body to [EEx ia] IIC, having the following maximum output parameters:
 DB5-24:
 $U_o = 28V, I_o = 147mA, P_o = 0.81W$
 DB5-12:
 $U_o = 15.7V, I_o = 150mA, P_o = 0.56W$
- Other barriers having lower values than these are permitted.
- In any safety barrier used the output current must be limited by a resistor "R" such that:
 $I_o = U_o / R$
- The capacitance and inductance of the hazardous area cable must not exceed the values quoted in the certificate for the particular barrier/isolator used. See table 1. If the inductance to resistance ratio (L/R) of the cable is higher than the ratio of the barrier/isolator, the maximum length that can be connected to the interface has to be calculated.
- The installation must comply with the appropriate national installation requirements e.g. in the U.K. BSEN 60079-14:1997.
- The circuit in the hazardous area must be capable of withstanding 500V RMS to earth or frame for one minute when using zener diode safety barriers.

Cable Parameters

Group	Capacitance μF	Inductance μH	L/R ratio $\mu H/\Omega$
Typical 28V / 300 Ω zener barrier			
IIC	0.083	4.2	55
IIB	0.65	12.6	165
IIA	2.15	33.6	440

Table 1



Operating Instructions

Tone Selection

The required tone should be selected by referring to Table 2 below. The 5-way DIL switches on the PCB should then be set to the code as shown (1 being equivalent to the on position, 0 being equivalent to the off position).

Sound Level

The output sound level shown is for a sounder powered from an RTK WIS1211 interface or from an RTK S951 barrier, fed by 24VDC.

Tone no	Tone frequency	2 nd tone	DIL switch setting 12345	Tone description	Level dBA
1	Alt Tones 800/970 Hz at ¼ sec	14	11111		88
2	Sweeping 800/970 Hz at 7 Hz	14	11110		91
3	Sweeping 800/970 Hz at 1 Hz	14	11101		94
4	Continuous at 2850 Hz	14	11100	HF 2 nd tone	102
5	Sweeping 2400-2850 Hz at 7 Hz	4	11011		100
6	Sweeping 2400-2850 Hz at 1 Hz	4	11010		103
7	Slow Whoop	14	11001		94
8	Sweep 1200-500 Hz at 1Hz	14	11000		91
9	All tones 2400-2850 Hz at 2 Hz	4	10111		100
10	Int tone of 970 Hz at 1 Hz	14	10110		83
11	Alt tones 800-970 Hz at 7/8 Hz	14	10101		87
12	Int tone at 2850 Hz at 1 Hz	4	10100		100
13	970 Hz at ¼ sec on 1 sec off	14	10011		83
14	Continuous at 970 Hz	14	10010	LF 2 nd tone	85
15	554 Hz for 100mS/440 Hz for 400mS	14	10001	French Fire	91
16	Int 660 Hz 150mS on 150mS off	14	10000	Swedish Fire	86
17	Int 660 Hz 1.8 sec on 1.8 sec off	14	01111	Swedish Fire	87
18	Int 660 Hz 6.5 sec on 13 sec off	14	01110	Swedish Fire	88
19	Continuous 660 Hz	14	01101	Swedish Fire	87
20	Alt 554-440 Hz at 1 Hz	14	01100	Swedish Fire	93
21	Int 660 Hz at 7/8 Hz	14	01011	Swedish Fire	88
22	Int 2850 Hz 150mS on 100mS off	14	01010	Pelican Crossing	100
23	Sweep 800-970 Hz at 50Hz	14	01001	Low Freq Buzz	92
24	Sweep 2400-2850 Hz at 50 Hz	14	01000	High Freq Buzz	99
25	3 970 Hz pulses 0.5 on/0.5 off, 1.5 off	14	00111		83
26	3 2850 Hz pulses 0.5 on/0.5 off, 1.5 off	14	00110		102

Table 2





Maintenance

During the life of the sounder, it should require little or no maintenance. However, if abnormal or unusual environmental conditions occur or due to plant damage or accident etc, then a visual inspection is recommended.

Approvals

Country and Authority	Standard	Certificate number	Approval for
Canada CSA	C22.2 No's 0, 0.4, 0.5, 25, 30, 205	79122	Class 1 Groups A-D
FM certificate	Class 3600 and 3610	J.I. 3008604	Class 1, Div 1 Groups A-D
UK HSE(M)	EN50014 EN50020 EN50303	MECS01ATEX4260	Ex I M1 EEx ia I
UK BASEEFA to CENELEC	EN50014 EN50020 EN50284	BAS00ATEX1259	Ex II 1 G EEx ia IIC T4


Certificates available on request.





Due to our policy of continuous product development, we reserve the right to amend these specifications without notice.



Overall Drawing

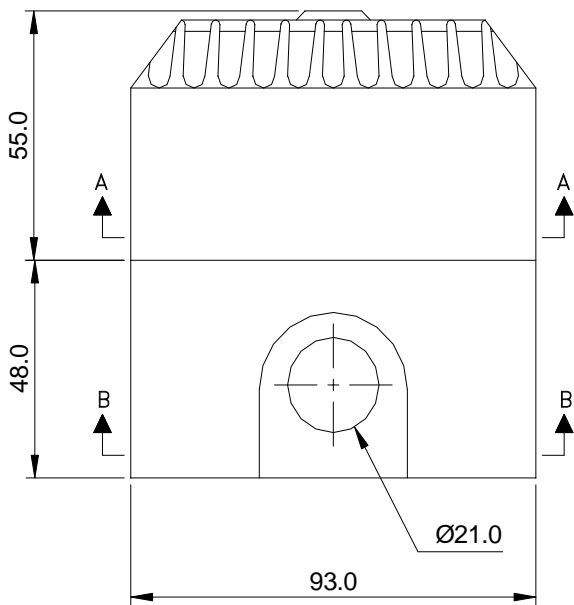

TWO KNOCK-OUT ENTRIES FOR M20
 CABLE GLANDS AND SPACE ON BASE TO
 DRILL FOR M20 CABLE GLAND

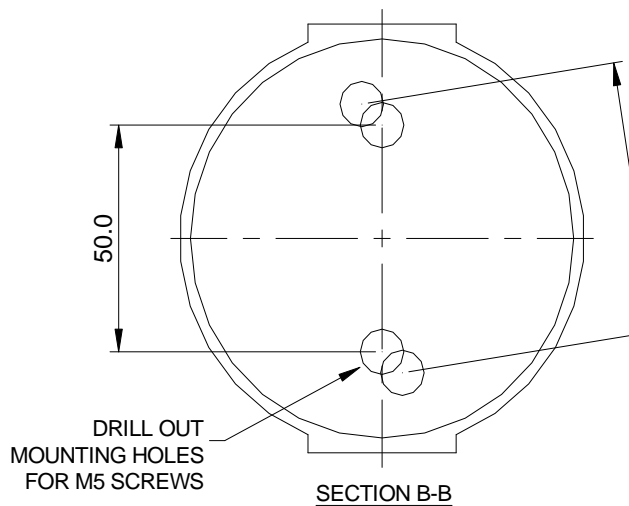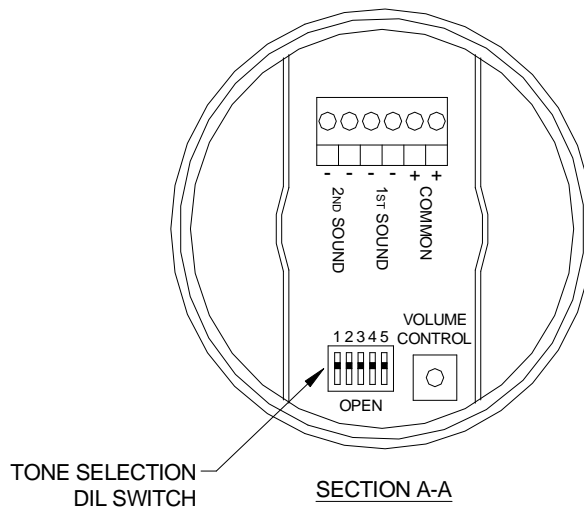

Other RTK Products

RTK Instruments produce a range of complementary products for many applications in the Industrial Control and Instrumentation field for both safe and hazardous areas, as listed below.

All standard products come with a **5 year warranty** from this ISO9001:2000 approved company:

- **Alarm Annunciators**
- **Remote Logic Alarm Systems**
- **Alarm Management software and Touch-screen Annunciators**
- **Lamp-boxes and Display Facias**
- **Sequence of Event Recorders**
- **Trip Amplifiers**
- **Trip Monitoring Systems**
- **Signal Converters and Isolators**
- **Frequency Converters**
- **Universal Panel Meters and Large Displays**
- **Power Supplies**
- **Loop Powered Isolators and Displays**
- **Complete range of Hazardous Area products including:**
- **Intrinsically Safe Alarm annunciators**
- **Explosion Proof Alarm annunciators**
- **Intrinsically Safe LED Beacons**
- **Intrinsically Safe Light Towers**
- **Intrinsically Safe LED indicators**
- **Intrinsically Safe Illuminated switches and pushbuttons**
- **Intrinsically Safe Sounders**
- **Intrinsically Safe Relays**
- **IS Interface units including Zener Barriers, IS Isolators and Multiplexers**

Please ring our sales office to obtain our latest brochure.

Due to our policy of continuous product development, we reserve the right to amend these specifications without notice.



RTK Instruments Limited
St James Business Park,
Knaresborough, North Yorkshire,
England. HG5 8PJ

Telephone: +44 (0)1423 580500
Facsimile: +44 (0)1423 580501
Web: www.rtkinstruments.com
Email: enquiry@rtkinstruments.com

RTK
INSTRUMENTS

EC DECLARATION OF CONFORMITY

This is to certify that the DB5 Intrinsically Safe Sounder

Supplied by:-

**RTK INSTRUMENTS LTD
ST JAMES BUSINESS PARK
KNARESBOROUGH
NORTH YORKSHIRE
HG5 8PJ**

Conforms to the protection requirements of the following directives:

- Council directive 89/336/EEC (EMC Directive) to BS EN50082-2 and BS EN50081-2
- Council Directive 94/9/EC (ATEX Directive) to EN50014, EN50020 and EN50284


And there are no changes required to enable compliance to the replacement standards, EN60079-0:2006, EN60079-1:2004 and EN60079-26:2007

The product is certified to:

 Ex II 1 G EEx ia IIC T4

Certificate No: BAS00ATEX1259

The Quality System is certified and monitored by Baseefa Ltd, Rockhead Business Park, Staden Lane, Buxton, Derbyshire, SK17 9RZ



.....
PAUL HARTLEY - MANAGING DIRECTOR

Date: 12th March 2008



Manufacturers of

Alarm Annunciators and Systems | Sequential Event
Recorders | Display Facias | Hazardous Area Interface,
Alarm and Display Products | Signal Conditioning &
Trip Amplifiers | Process Instrumentation

RTK Instruments Limited
St James Business Park,
Knaresborough, North Yorkshire,
England. HG5 8PJ

Telephone: +44 (0)1423 580500
Facsimile: +44 (0)1423 580501
Web: www.rtkinstruments.com
Email: enquiry@rtkinstruments.com



REV	Detail of Change	Date
0	Original Issue	
1		
2		
3		
4	Changed to new RTK Instruments format	
5	EC Declaration added	21/05/08
6	Updated EC Declaration and replaced S90 and WIS for MTL equivalents	24/10/2008

